


Description	Thickness	One-lamp	Two-lamp
Broad-field screen	0.25-in	FIX-T01/CS-BF	FIX-T02/CS-BF
Medium-field screen	0.50-in	FIX-T01/CS-MF	FIX-T02/CS-MF
Narrow-field screen	0.75-in	FIX-T01/CS-NF	FIX-T02/CS-NF
Prismatic lens	0.125-in	FIX-T01/LENS	FIX-T02/LENS



Color Temperature	CRI	Lumens	Lamp Life*	Part Number
3200 Kelvin Studioline	85	3800	8,000 Hrs	009-55W32KSP
3200 Kelvin High-Rendering	95	2800	2,000 Hrs	009-55W32KHR
5600 Kelvin Studioline	85	3800	8,000 Hrs	009-55W56KSP
5600 Kelvin High-Rendering	95	2800	2,000 Hrs	009-55W56KHR
3000 Kelvin	82	4800	10,000 Hrs	009-55W30K82
3500 Kelvin	82	4800	10,000 Hrs	009-55W35K82
4100 Kelvin	82	4800	10,000 Hrs	009-55W41K82

\*Note: Lamp life is de-rated to ensure color temperature consistency.

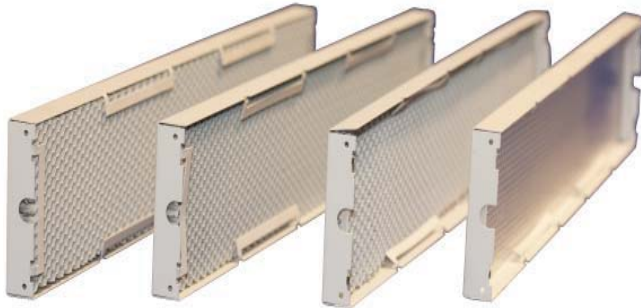

580 Mayer Street - Building # 7 - Bridgeville, PA 15017 USA

Phone: 1.412.206.0106 - Fax: 1.412.206.0146