




580 Mayer Street, Building #9, Bridgeville, PA 15017, USA

Brightlines.com | 1-412-206-0106

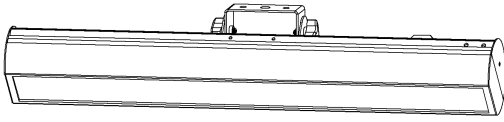

**Construction**

The heat sink is made of 6063-T5 aluminum extrusion.

Drivers

All drivers are high-frequency electronic, with a power factor $>.90$, THD $<20\%$, and a Class A sound rating. Drivers are mounted in the fixture module housing. The power and control inputs are on the back of fixtures. Operational voltage is universal, 120 - 277V.

RDM Control

DMX 512 Remote device management available with bi-directional communication for address, status, temperature, and life expectancy.

Low Voltage Control

19" Rack-mounted driver is available with up to 600w of power. Multiple drivers can be linked for any size project. Low voltage control available for 120-230V applications.

LED Technology

The fixture utilizes mid-power LEDs with high-quality illumination (>97 CRI) for videoconferencing and general lighting applications. Each fixture module has a power consumption of 32 watts.

Directional Beam Angle

The module components are adjustable ± 90 degrees.

Module

One module fixture is available. Each module comes with a spot or flood beam control option.

Fixture Dimensions and Weight

Single Module:

(22.52- x 3.50 in. dia.)

(572.05- x 89 mm. dia.)

Fixture Weight: 8-lbs (3.63-kg)

See shipping information chart for gross weights and dimensions.

Certifications


MET

One Module Part Numbers


MOD	1	-		-		-		-		
Flex-T1	Module Qty		Dimming/Control		Color Temperature/Color Rendering Index		Optics		Mounting	Finish
	1 = One module		A = 0-10V (Analog)		30 = 3000K / 97 CRI		F=Flood		TV= C-Clamp	BK = Black
			D=DMX/RDM		35 = 3500K / 97 CRI		S=Spot		SM=Surface Mount	WH = White
			X = DALI		40=4000K / 97 CRI					
			B = Low Voltage DMX (AV/720)		50=5000K / 97 CRI					
					VW = 3000K - 5600K / 97 CRI					

NOTE: When specifying "B" for low-voltage, always select "VW" for color temperature.
 Variable White (VW) available on DALI and DMX fixtures only.


Sample Fixture Configurations



One Module Flood
 (example: MOD1-D-VW-F-TV-WH)



One Module Spot
 (example: MOD1-XVW-S-SM-BK)



One Module Flood
 (example: MOD1-B-VW-F-SM-BK)