



SeriesONE L1.2 LED Studio Fixture

Outstanding Lighting Performance in
Compact Form



Construction

- 14-gauge formed aluminum sheet metal construction. Heat sink is made of aluminum extrusion. The driver can be serviced without removing the light engine.

Fixture Body Finish

- Metallic steel gray finish is standard, with custom colors available.

Electrical

- A removable 12-ft (3.7-m) power cord with a NEMA 5-15P plug is standard. Other plug types are available as options. The fixture is protected by an externally removable fuse with onboard spare. Power draw is 110 watts.

Drivers

- All LED Drivers are high-frequency electronic, with a power factor $>.90$, THD $<20\%$, and a Class A sound rating. LED Drivers are mounted internally to the fixture housing. The power and control inputs are on the back. The dimming protocol is DMX/RDM.

LED Technology

- The fixture utilizes high CRI LEDs to emit high quality illumination (>97 CRI) for broadcast and videoconferencing applications. Variable CCT from 3200K - 5600K.

Mounting

- Fixture has a 10-gauge horizontal or vertical extruded aluminum yoke, with palm handles standard. Each fixture is supplied with a 2-inch OD C-clamp with an integral safety cable. Compact yoke also available.

Accessories

- A variety of accessories are available.




Fixture Dimensions and Weight

- 13.50in (342.90mm) wide x 12.49in (317.16mm) high x 9.12in (231.66mm) deep. Overall width of the fixture increases to 16.74in (425.07mm), with the palm handles included.
- Fixture Weight: 17.16lb (7.71kg)
See shipping information chart for gross weights and dimensions.

Certifications

- UL/cUL



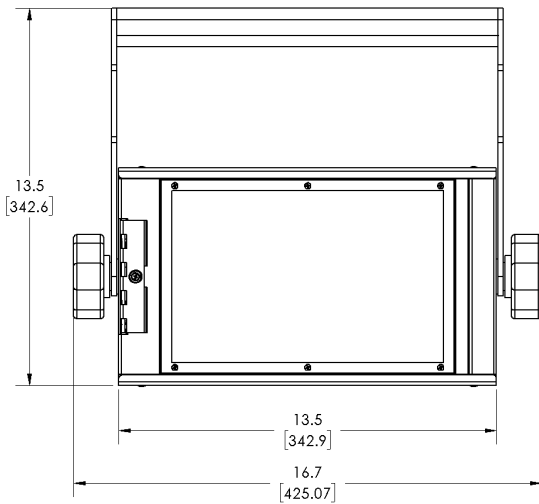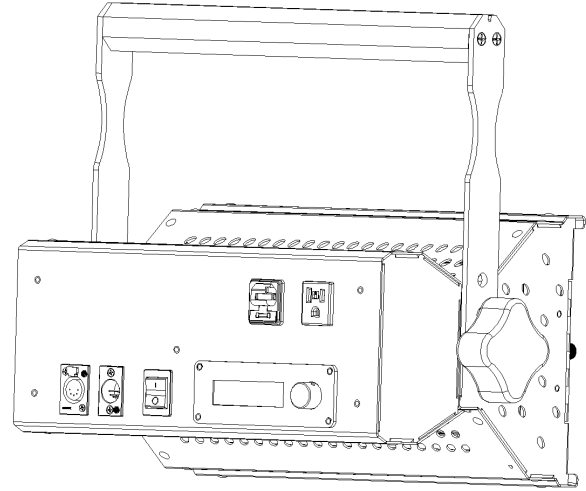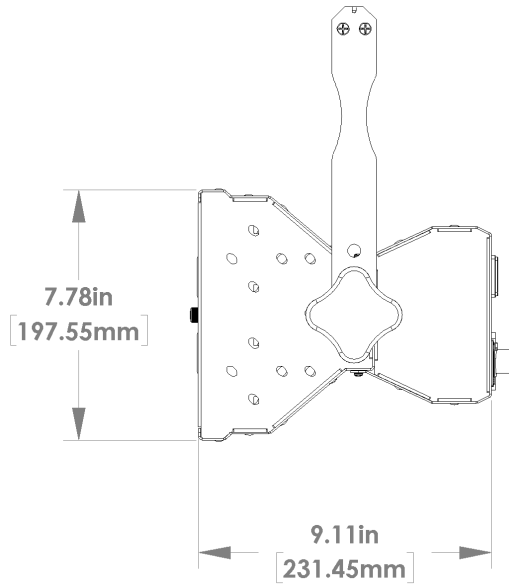

L	1.2	X	
SeriesOne	Power	Ballast Type	Voltage
	105 Watts	DMX	1 = 120 V
			2 = 230 V

-	VW	-
	Color Temperature	
	3200K to 5600K	
	CCT	

	Yoke Type
	H = Horizontal
	V = Vertical

Custom Finish available.
RF (wireless radio frequency control) available.
Contact Customer Service for model numbers.

580 Mayer Street, Building #7, Bridgeville, PA 15017, USA

Brightlines.com | 1.412.206.0106

