



Flex-T2

Precision Lighting for Every Setting

Two Module Part Numbers


FLXT	2	-		-		-			
Flex-T	Module Qty		Dimming/Control		Color Temperature/Color Rendering Index		Optics	Sizing	Panel Options
	2 = Two modules		A = 0-10V (Analog)		30 = 3000K / 97 CRI		F=Flood	I=Inch	MM-Mini Mount
			E = Lutron LDE1		35 = 3500K / 97 CRI		S=Spot	M=Metric	CM-Center Mount
			X = DALI		40=4000K / 97 CRI				45-45° Mount
			B = Low Voltage DMX (AV/720)		50=5000K / 97 CRI				OM - Offset Mount
			Z = PoE (60W)*		VW = 3000K - 5600K / 97 CRI				
			D = DMX/RDM						

NOTE: When specifying "B" for low-voltage, always select "VW" for color temperature.


Variable White (VW) available on DALI and DMX fixtures only.

*Consult factory to ensure PoE system compatibility.


Sample Fixture Configurations



Two Modules, Spot-Flood, Mini-Mount
(example: FLXT2-X35-FS-IMM)



Two Modules, Spot, Center-Mount
(example: FLXT2-X35-SS-ICM)

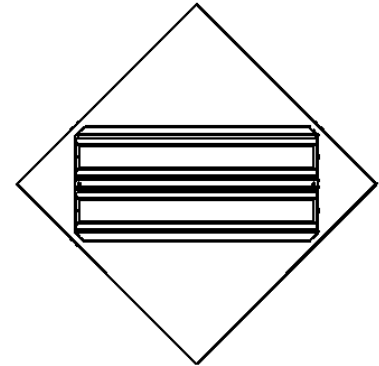

Two Modules, Flood, 45 Degree-Mount
(example: FLXT2-X35-FF-I45)