



Flex-T2

Precision Lighting for Every Setting

Construction

The fixture housing is made of formed, cold-rolled sheet steel. The heat sink is made of 6063-T5 aluminum extrusion.

Fixture Body Finish

Low-gloss Signal White finish (Ral #9003, 20% Gloss) is standard, with custom colors available.

Drivers

All drivers are high-frequency electronic, with a power factor >.90, THD <20%, and a Class A sound rating. Drivers are mounted in the fixture module housing. The power and control inputs are on the back of fixtures. Operational voltage is universal, 120 - 277V.

RDM Control

DMX 512 Remote device management available with bi-directional communication for address, status, temperature, and life expectancy.

Low Voltage Control

19" Rack-mounted driver is available with up to 600w of power. Multiple drivers can be linked for any size project. Low voltage control available for 120-230V applications.

Power Over Ethernet Control

Fixtures are available with PoE control nodes. Consult with factory for specification of complete PoE systems. PoE Control available for 120-230V applications.

LED Technology

The fixture utilizes mid-power LEDs with high-quality illumination (>97 CRI) for videoconferencing and general lighting

applications. Each fixture module has a power consumption of 32 watts.

Directional Beam Angle

The module components are adjustable +/- 55 degrees.

Fixture Carriage (Module)

One module fixture is available. Each module comes with a spot or flood beam control option.

Fixture Dimensions and Weight

Inch Panel: 2ft x 2ft
23.75 X 23.75 X 4.54in
(603.25 x 603.25 x 115.3mm)

Metric Panel: 600mm x 600mm 595 x 595 x 115.3mm
(23.43 X 23.43 X 4.54in)
Fixture Weight (2 module): 24.51lbs (11.12kg)

Inch Panel: 1ft x 2ft (only available with 2 modules)
11.75 X 23.75 X 4.54in
(298.45 x 603.25 x 115.3mm)

Metric Panel: 300mm x 600mm
298 x 595 x 115.3mm
(11.71 X 23.43 X 4.54in)
Fixture Weight: 21.45lbs (9.73kg)

See shipping information chart for gross weights and dimensions.

Certifications


MET

One Module Part Numbers

FLXT	2	-		-		-		-		
Flex-T	Module Qty		Dimming/Control		Color Temperature/Color Rendering Index		Optics		Sizing	Panel Options
	2 = Two modules		A = 0-10V (Analog)		30 = 3000K / 97 CRI		F=Flood		I=Inch	MM-Mini Mount
			E = Lutron LDE1		35 = 3500K / 97 CRI		S=Spot		M=Metric	CM-Center Mount
			X = DALI		40=4000K / 97 CRI					45-45° Mount
			L = Low Voltage DMX (Remote Driver)		50=5000K / 97 CRI					OM - Offset Mount
			Z = PoE (60W)*		VW = 3000K - 5600K / 97 CRI					
			D = DMX/RDM							

NOTE: Variable White (VW) available on DALI and DMX fixtures only
*Consult factory to ensure PoE system compatibility.


Sample Fixture Configurations



Two Modules, Spot-Flood, Mini-Mount
(example: FLXT2-X35-FS-IMM)



Two Modules, Spot, Center-Mount
(example: FLXT2-X35-SS-ICM)

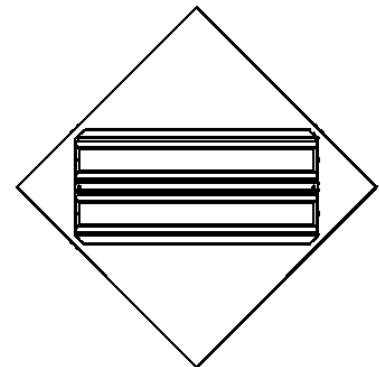

Two Modules, Flood, 45 Degree-Mount
(example: FLXT2-X36-FF-I45)