

Construction

14-gauge formed aluminum sheet metal construction. Heat sink is made of aluminum extrusion. The driver can be serviced without removing the light engine or mixing chamber.

Fixture Body Finish

Metallic cool charcoal finish is standard, with custom colors available.

Electrical

A removable 12-ft (3.7-m) power cord with a NEMA 5-15P plug is standard. Other plug types are available as options. The fixture is protected by an externally removable fuse with onboard spare. Power draw is 115 watts.

Drivers

All LED Drivers are high-frequency electronic, with a power factor $>.94$, THD $<10\%$, and a Class A sound rating. LED Drivers are mounted internally to the fixture housing. The power and control inputs are on the handle. The dimming protocol is DMX.



LED Technology

The fixture utilizes remote phosphor technology to emit high quality illumination (>95 CRI) for broadcast and videoconferencing applications. Phosphor plates are available in either 3200 or 5600 Kelvin.

Fixture Dimensions and Weight

13.50-in (342.90-mm) wide x 12.49-in (317.16-mm) high x 10.37-in (263.41-mm) deep. Overall width of the fixture increases to 16.74-in (425.07-mm), with the palm handles included. Fixture Weight: 12.58-lb (5.71-kg)

Mounting

Fixture has a 10-gauge horizontal extruded aluminum yoke, with palm handles standard. Each fixture is supplied with a 2-inch OD C-clamp with an integral safety cable.

Accessories

A variety of accessories are available.

Electrical Certifications




UL, cUL and CE



580 Mayer Street - Building # 7 - Bridgeville, PA 15017 USA

Phone: 1.412.206.0106

www.brightlines.com

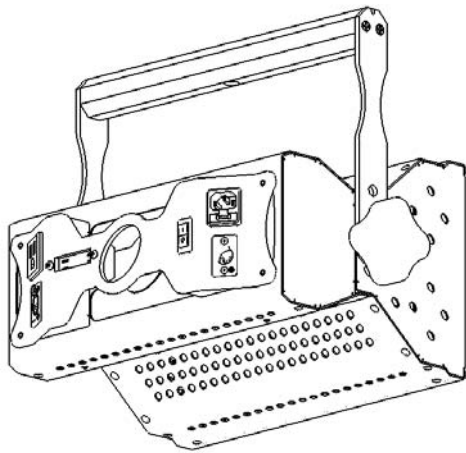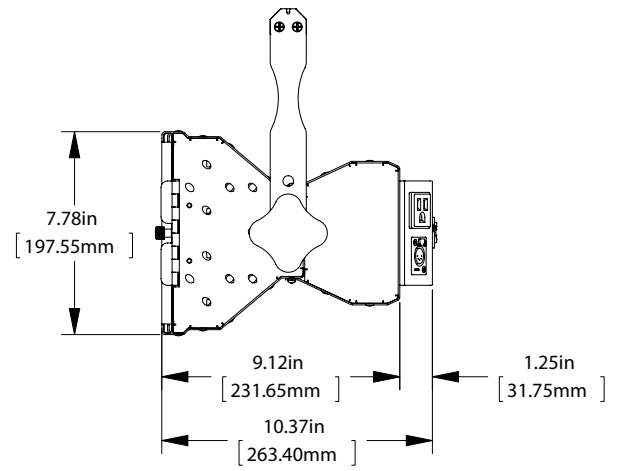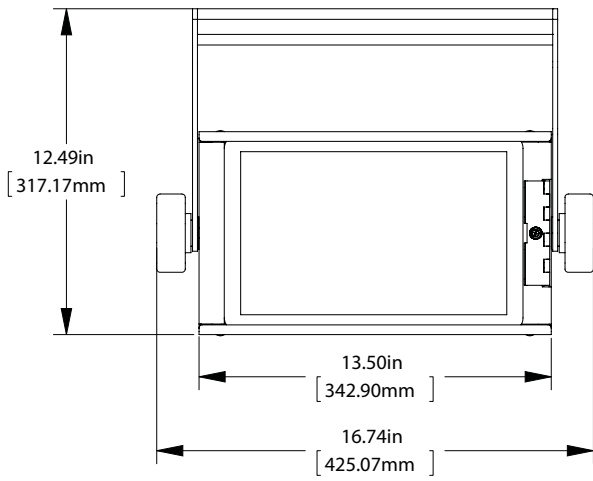

L	Power	Ballast Type	Voltage
	1.2 = 115 -watt fixture	X = Digital	1 = 120V 2 = 230V

Color Temperature
32 = 3200K CCT
56 = 5600K CCT

Yoke Type
H = Horizontal
V = Vertical
C = Compact

Shipping Information
Length: 25-in (635-mm)
Width: 12-in (305-mm)
Height: 13-in (331-mm)
Weight: 15-lb (5.79-kg)

Note: Custom Finish is available. Add a "-CF" to the end of the part number.

580 Mayer Street - Building # 7 - Bridgeville, PA 15017 USA

Phone: 1.412.206.0106


www.brightlines.com



© 2018 Brightline LP All Rights Reserved

Specifications are subject to change without notice.

01/19/18

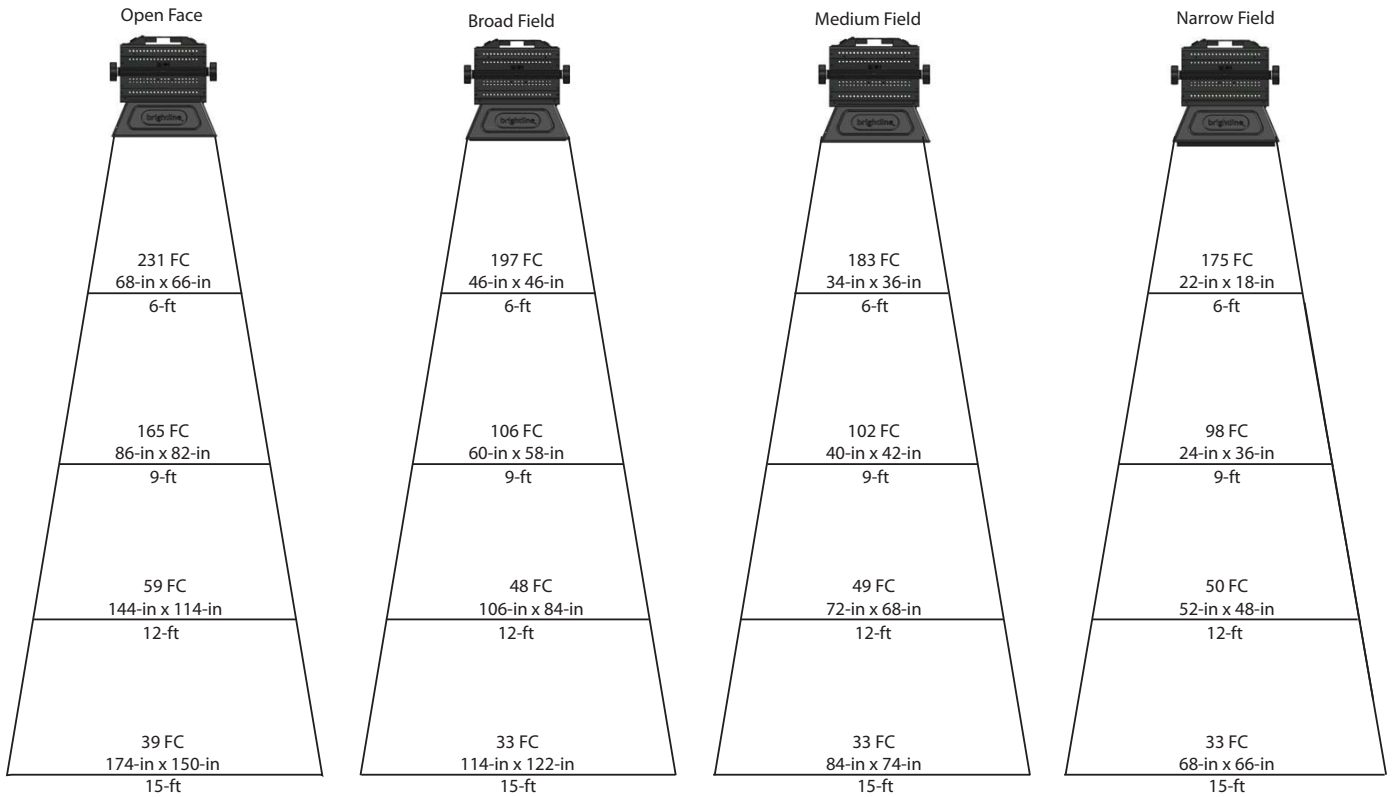

580 Mayer Street - Building # 7 - Bridgeville, PA 15017 USA

Phone: 1.412.206.0106

www.brightlines.com



© 2018 Brightline LP All Rights Reserved

